


specifications

RF7.UPF.2.SD

ReFlex Series, 2 Door (Solid), Upright Freezer

Project: _____

Item No: _____

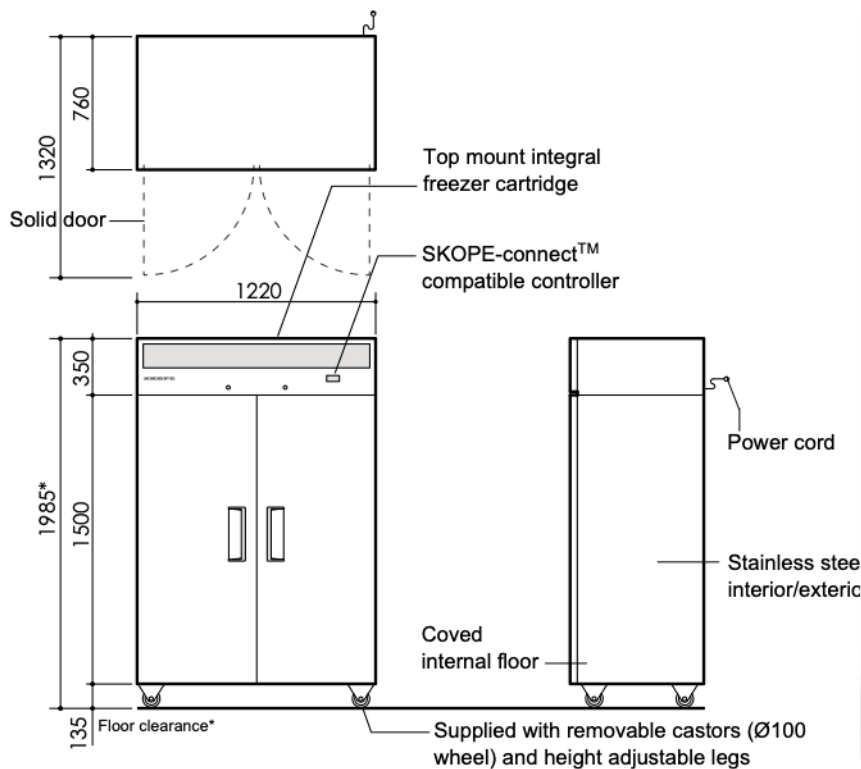

CABINET

| | |
|-----------------------|---------------------------------------------------------|
| Model ID | RF7.UPF.2.SD |
| SKOPE ID | RF7UPF2-SCTP-SD |
| Doors | 2 × self-closing, lockable, solid swing doors. LH, RH |
| Internal door opening | 2 × door openings: 1375mm high × 495mm wide |
| Shelves | 10 × adjustable height shelves: 530mm wide × 530mm deep |
| Worktop | n.a. |
| Material | 304 AISI stainless steel interior and exterior |

PERFORMANCE

| | |
|--------------------------|---------------------------------------------------------------|
| Max. ambient temp. | 40°C |
| Temperature range | -21°C to -18°C (adjustable with SKOPE-connect -26°C to -12°C) |
| Total energy consumption | 11.81 kWh/24hr |

ELECTRICAL

| | |
|-------------------|-----------------------------------------------|
| Climate class | 5 (40°C/40% RH) |
| Interior lighting | 2 × 1200mm, 12W LED light (door activated) |
| Power cord | Supplied with 2.9m, 10 Amp plug and lead |
| Power supply | 220-240 Volts a.c. 50 Hz, single phase supply |
| Current draw | 4.0 Amps (includes unit 3.6 Amps) |

REFRIGERATION

| | |
|---------------------------|------------------------------------------------------------------------------|
| Controller | SCS Connect (SKOPE-connect™ compatible) |
| Connectivity interface | Bluetooth® wireless technology |
| Refrigeration system | Top mounted, integral, removable freezer cartridge (part number UTKDDI-0020) |
| Refrigerant | R404A / 440g |
| Nominal capacity | 600 Watts |
| Heat rejection (Avg/peak) | 495 Watts/675 Watts |
| Drainage | No plumbing required |

DIMENSIONS

| | External | Internal |
|-----------------|--------------------|----------|
| Height | 1985mm* | 1395mm |
| Width | 1220mm | 1100mm |
| Depth | 760mm | 600mm |
| Floor area | 0.93m ² | |
| Weight | 171kg | |
| Internal volume | 920 litres | |

* With supplied castors fitted. See height variation below

Height variation

| | |
|---------------------------------|-------------|
| Supplied castors | 1985mm |
| Supplied height adjustable legs | 1995-2035mm |
| No castors or legs | 1850mm |

Dimensional tolerances

Before installing this cabinet allow the following dimensional tolerances:

| Linear dimensions | Overall cabinet dimensions | |
|-------------------|-----------------------------|------------------|
| Less than 1 metre | ±5mm | |
| More than 1 metre | -5mm to +10mm | |
| | Length of multiple cabinets | |
| | At each joint | At each end wall |
| Less than 1 metre | ±5mm | +15mm |
| More than 1 metre | -5mm to +10mm | +15mm |

Ventilation requirements

| | |
|--------|--------------|
| Top | 300mm |
| Sides | Not required |
| Back | Not required |
| Bottom | Not required |